

# Altus 40 RTS

PRODUCT SPECIFICATIONS



# The precise and simple solution for the interior window covering market

## PRODUCT MAIN FUNCTIONALITIES



**Compatible with Solar protection functions**



**Remote limit setting**



**Round head**  
for reduced dimensions.




**"my" favourite**  
In one click move the blind to your favourite position.

## Somfy +

Quiet operation and all the benefits of RTS technology.

## RECOMMENDED TO SET WITH:

Universal test lead  
(ref. 9027064)

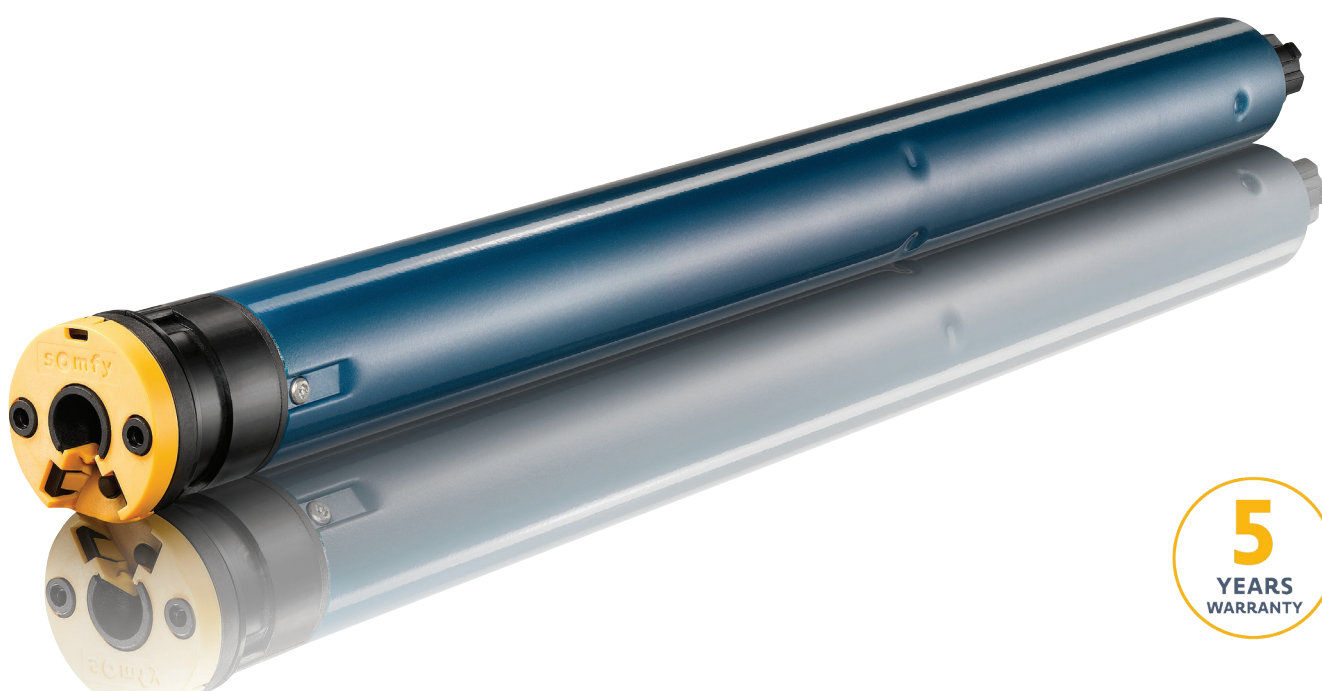

**somfy**

# Altus 40 RTS

## PRODUCT SPECIFICATIONS



### BENEFITS FOR PROFESSIONALS

#### Easy Integration

- Suitable for tubes diameter 40 mm or more (internal diameter)
- Available with inline connector for ease of programming
- Integrated antenna

#### Setting from a distance

- Up and down end limits set by remote control

### BENEFITS FOR END USERS

#### Simple, effortless control

- Quiet operation
- Move your blinds effortlessly and remotely thanks to the radio control
- Move your blinds to your favourite "my" position in one click

#### Access to RTS product range for more benefits

- Solar protection functions compatibility

### COMPATIBLE END-PRODUCTS



Roller blinds



Roman blinds



Projection screens


### TECHNICAL DATA

<b>Thermal Time</b>	4 minutes
<b>Supply</b>	AC
<b>Index protection rating</b>	IP 44 (indoor use only)
<b>Limit switch unit</b>	Electronic
<b>Limit switch capacity</b>	Unlimited
<b>Temperature working range</b>	-10°C to +40°C
<b>Electric insulation</b>	Class II
<b>Capacity of memory</b>	12 different transmitters plus 3 wireless sensors
<b>Coding</b>	Rolling code with 16 million possibilities

### PERFORMANCES

	3/30	13/10
<b>Nominal Voltage</b>	230V / 50Hz	
<b>Torque (Nm)</b>	3	13
<b>Speed (rm)</b>	30	10
<b>Rated Current (A)</b>	0.42	0.52
<b>dBA</b>	50	52
<b>End-limit unit versions available</b>	RTS	RTS
<b>Radio Frequency</b>	433, 42 MHz	
<b>Item Number</b>	1020124	1024171
<b>Item Number with inline connector</b>	1020172	1024234

230 V



### DIMENSIONS

<b>L (mm)</b>	497	497
---------------	-----	-----

