# 

# ACRF 6

Powerful motor. Levelling control. Limit setting. The AC motor can provide continuous power and is the ideal solution when establishing wiring during a renovation or new build.



#### BI-DIRECTIONAL COMMUNICATION

Automate Radio Communication utilizes two-way communication to provide up-to-date feedback on battery levels and shade postioning via the Automate Pulse 2 app.



Whether using a remote control or app for shade setup, Automate programming instructions are streamlined to have your shades moving as quickly as possible.




#### FAVORITE POSITIONING

Add a programmable shade position in addition to the upper and lower limits that can be defined as your "favorite".



#### PRECISE LIMIT ADJUSTMENT

Incremental steps during limit setting allows for precise positioning of the

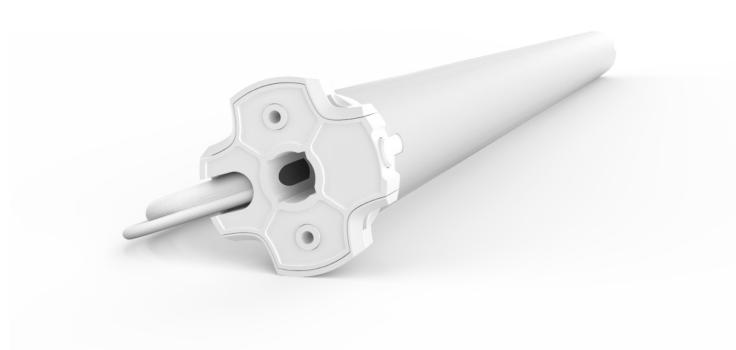










# PRODUCT SPECIFICATIONS

Part #: MTACRF35-6-240V AC Tubular motor with RF control.

Voltage	240V	Limit Switch Type	Electronic
Torque	6.0Nm	Current	0.85A
Max Run Time	4 min	Temp Working Range	32°F to 140°F (0°C to 60°C)
Speed	33 RPM	Insulation Class	III
Radio Frequency	433.92 MHz	Sound Level	~44 dB
RF Modulation	FSK	Power	102W
IP Rating	IP44		

## **DIMENSIONS**

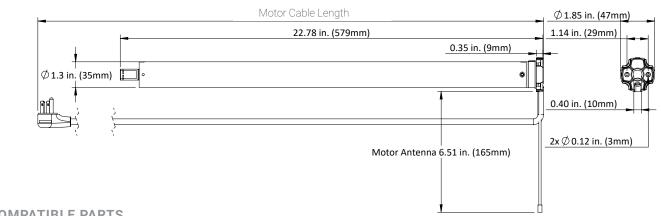

**COMPATIBLE PARTS** 

Tubes



**Crown & Drives** 

2" Ribbed Tube	MTCRDR-35-2	
S45 - Light		
S45 - Std	MTCRDR-35-S45	
S45 - HD		
40mm Octagonal (3rd party product)	VB40-0306-050408 & MTCR-35-2-OCT	

### **Adaptors**



- MTAD-252835-SL
- MTAD-25-28-SLV2W
- RB40-1402-069400

#### **COMPATIBLE SYSTEMS**

- Skyline Roller Shades
- S45 Roller Shades

# **COMPATIBLE ACCESSORIES** (refer to catalog for full item listings)

## Controllers





Pulse 2 HUB

Push 5 remotes

