

# Sonesse 40 RTS

PRODUCT SPECIFICATIONS



# Putting window coverings in motion with quiet precision

## PRODUCT MAIN FUNCTIONALITIES



**Designed for silence**




**Remote limit setting**



**Compatible with Solar protection functions**



**"my" favourite**  
In one click move the blind to your favourite position.



**Slats tilting**




**Round head**  
for reduced dimensions.

## Somfy+

Quiet operation and all the benefits of RTS technology.

### RECOMMENDED TO SET WITH:

Universal test lead  
(ref. 9027064)

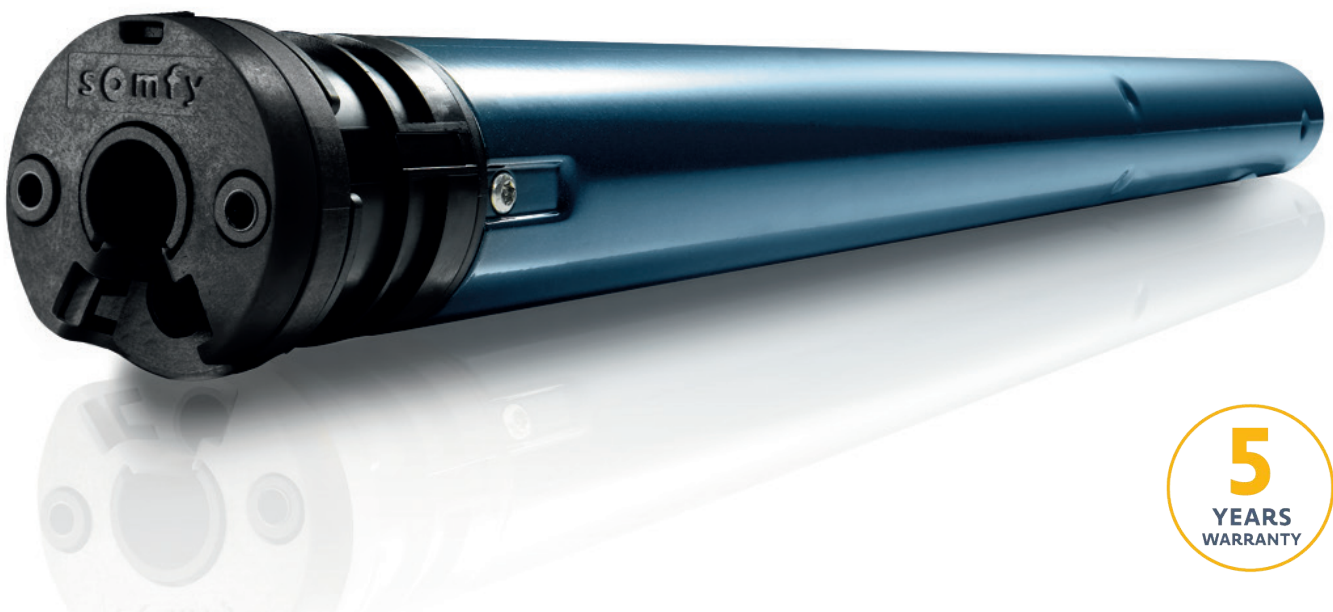

**somfy**

# Sonesse 40 RTS

## PRODUCT SPECIFICATIONS



### BENEFITS FOR PROFESSIONALS

#### Easy Integration

- Suitable for tubes diameter 40 mm or more (internal diameter)
- Available with inline connector for ease of programming
- Integrated antenna

#### Setting from a distance

- Up and down end limits set by remote control
- Visual feedback of the product to confirm any step of setting and programming

### BENEFITS FOR END USERS


#### Simple, effortless control

- Quiet operation
- Move your blinds effortlessly and remotely thanks to the radio control
- Move your blinds to your favourite "my" position in one click

#### Access to RTS product range for more benefits

- Solar protection functions compatibility

### COMPATIBLE END-PRODUCTS

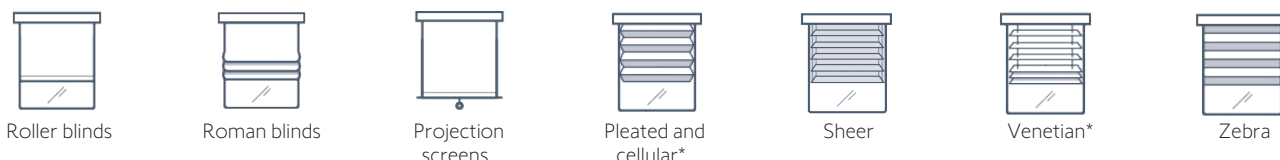

\* Using CTS40

### TECHNICAL DATA


|                                  |   |
|----------------------------------|---|
| <b>Thermal Time</b>              | 4 minutes   |
| <b>Supply</b>                    | AC  |
| <b>Index protection rating</b>   | IP 44 (indoor use only)                           |
| <b>Limit switch unit</b>         | Electronic  |
| <b>Limit switch capacity</b>     | 250 turns   |
| <b>Temperature working range</b> | 0°C to +60°C                                      |
| <b>Electric insulation</b>       | Class II  |
| <b>Capacity of memory</b>        | 12 different transmitters plus 3 wireless sensors |
| <b>Coding</b>                    | Rolling code with 16 million possibilities        |

### PERFORMANCES

|  | 3/30        | 6/20    | 9/12    |
|--|-------------|---------|---------|
| <b>Nominal Voltage</b>                   | 230V / 50Hz |         |         |
| <b>Torque (Nm)</b>                       | 3           | 6       | 9       |
| <b>Speed (rpm)</b>                       | 30          | 20      | 12      |
| <b>Rated Current (A)</b>                 | 0.44        | 0.55    | 0.98    |
| <b>Sound Level (dBA)*</b>                | 42          | 45      | 40      |
| <b>End-limit unit versions available</b> | RTS         | RTS     | RTS     |
| <b>Radio Frequency</b>                   | 433, 42 MHz |         |         |
| <b>Item Number</b>                       | 1001573     | 1001577 | 1001581 |
| <b>Item Number with inline connector</b> | 1002091     | 1002092 | 1002157 |

\* Power Level (measurement between 20 to 30 degrees Celcius) in dB(A) ref 1pW, motor is at max. sound level when ascending

### 230 V



### DIMENSIONS

| L (mm) | 504 | 535 | 535 |
|--------|-----|-----|-----|
|--------|-----|-----|-----|

